


T4I SINGLE BOARD COMPUTER

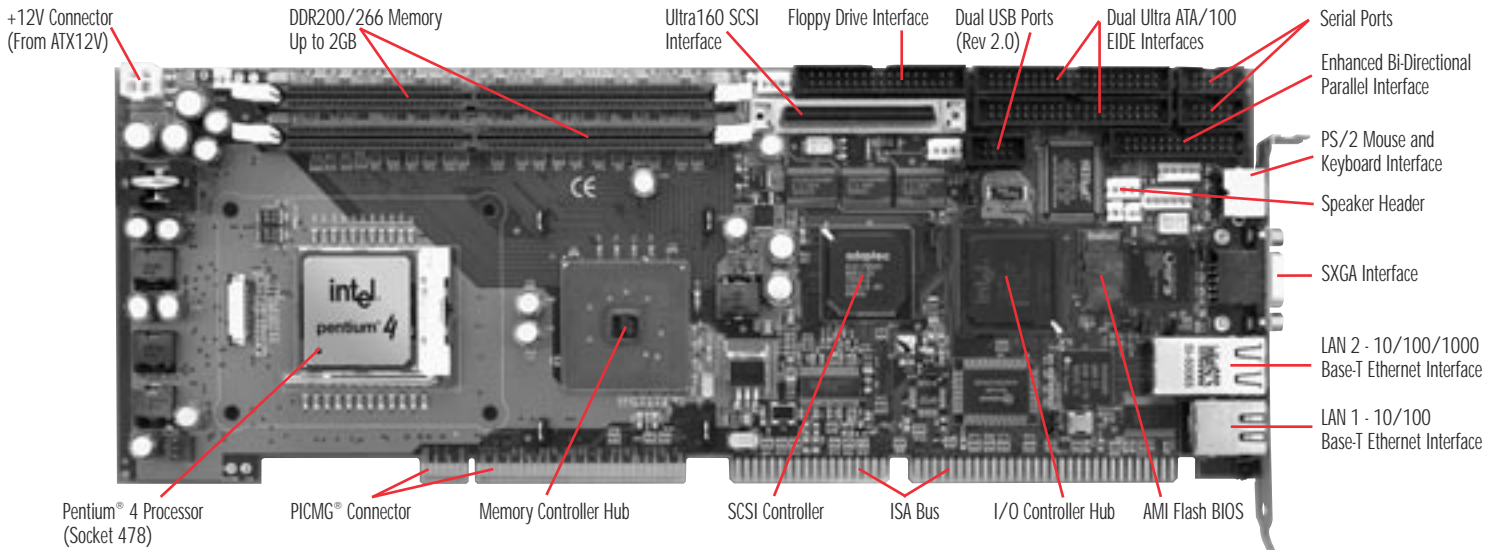

The T4I single board computer brings an increased level of longevity and innovation to Pentium® 4 applications. When designing a new system or upgrading an older PCI/ISA computing system, the T4I's Pentium 4 processor and 845-E chipset provide the ability to deploy long-life, state-of-the-art technology in a wide variety of robust applied computing applications.

PROCESSOR:

Intel® Pentium® 4 processor at 2.0GHz to 3.06GHz*
Intel® Celeron® processor at 2.0GHz*

**Higher speeds as available*

The Pentium 4 processor supports a 400/533MHz system bus as well as Intel's NetBurst™ micro-architecture. Both features combine to provide optimum system performance and fast program execution in a PCI/ISA single board computer. Some of the processor features that enable such performance enhancements are:

- Hyper-Pipelined technology
- Streaming SIMD Extensions 2 (SSE2)
- Advanced Dynamic Execution
- 512K Advanced Transfer Cache (L2)
- Execution Trace Cache that stores up to 12K of micro-operations and an 8K Data Cache (L1)

CACHE MEMORY (L2 AND L1):

The Pentium 4 processor supports a 512K integrated on-die Advanced Transfer Cache (L2). The cache is an 8-way set associative cache running at full processor core frequency.

The Celeron processor supports a 128K integrated on-die Advanced Transfer Cache (L2).

Both processors include a 12K level one (L1) Execution Trace Cache and 8K L1 data cache.

CHIPSET:

The chipset supports a 400/533MHz system bus, a maximum of two double-sided DIMMs with unbuffered DDR 200/266 (PC1600/PC2100) memory with ECC and a 266MB/s Hub Interface to the ICH4 I/O Controller.

ULTRA160 SCSI INTERFACE:

The Ultra160 SCSI interface uses an Adaptec AIC-7892 SCSI controller chip and supports SCSI device data transfer operations up to 160MB/s. The interface supports up to 15 SCSI devices, complies with the SPI-3 standard and is compatible with both single-ended and Low Voltage Differential (LVD) SCSI I/O. Software drivers are available for most popular operating systems.

DUAL ETHERNET INTERFACES:

LAN 1 provides a 10/100Base-T Ethernet interface using Intel's 82562ET Platform LAN Connect device and the ICH4 I/O Controller Hub. The 82562/ICH4 combination provides high-speed data transfers while offloading communication tasks from the system CPU. LAN 2 supports both 10/100Base-T and 1Gigabit Ethernet interfaces via Intel's 82540 controller.

EIDE ULTRA ATA/100 INTERFACES (DUAL):

Dual high-performance PCI EIDE interfaces are capable of supporting up to two IDE disk drives each in a master/slave configuration. The interfaces support Ultra ATA/100 with synchronous ATA mode transfers up to 100MB per second.

DDR200/266 MEMORY:

The DDR200/266 interface is a single-channel interface coming off the Memory Controller hub and terminating at two DIMM module sockets. The DIMM sockets can be independently populated with either PC1600 or PC2100 unbuffered memory modules with ECC. The memory interface supports auto detection of memory up to 2GB. Depending on the processor's system bus speed and which memory module type is used, the memory interface bandwidth is either 1600MB/s or 2100MB/s.

BUS SPEEDS:

ISA	- 16-bit/8MHz
PCI	- 32-bit/33MHz
Hub Interface	- 266MB/s
System or FSB	- 400MHz/533MHz

BIOS (FLASH):

The T4I uses AMIBIOS8. The flash BIOS resides in the 82802 Firmware Hub (FWH). AMIBIOS8 contains useful features such as:


- CMOS setup for system parameters
- Peripheral management for configuring on-board peripherals
- PCI-to-PCI bridge support and PCI interrupt steering
- Support for flash devices for BIOS upgrading via floppy interface

Some of the new AMIBIOS8 features supported on the T4I include:

- Integrated support for USB mass storage devices such as USB CD-ROM, CD-RW, etc.
- Faster POST execution
- Improved BIOS code modularity which streamlines the BIOS customization process while offering a higher degree of BIOS customization



Your Custom Industrial Computer Solution

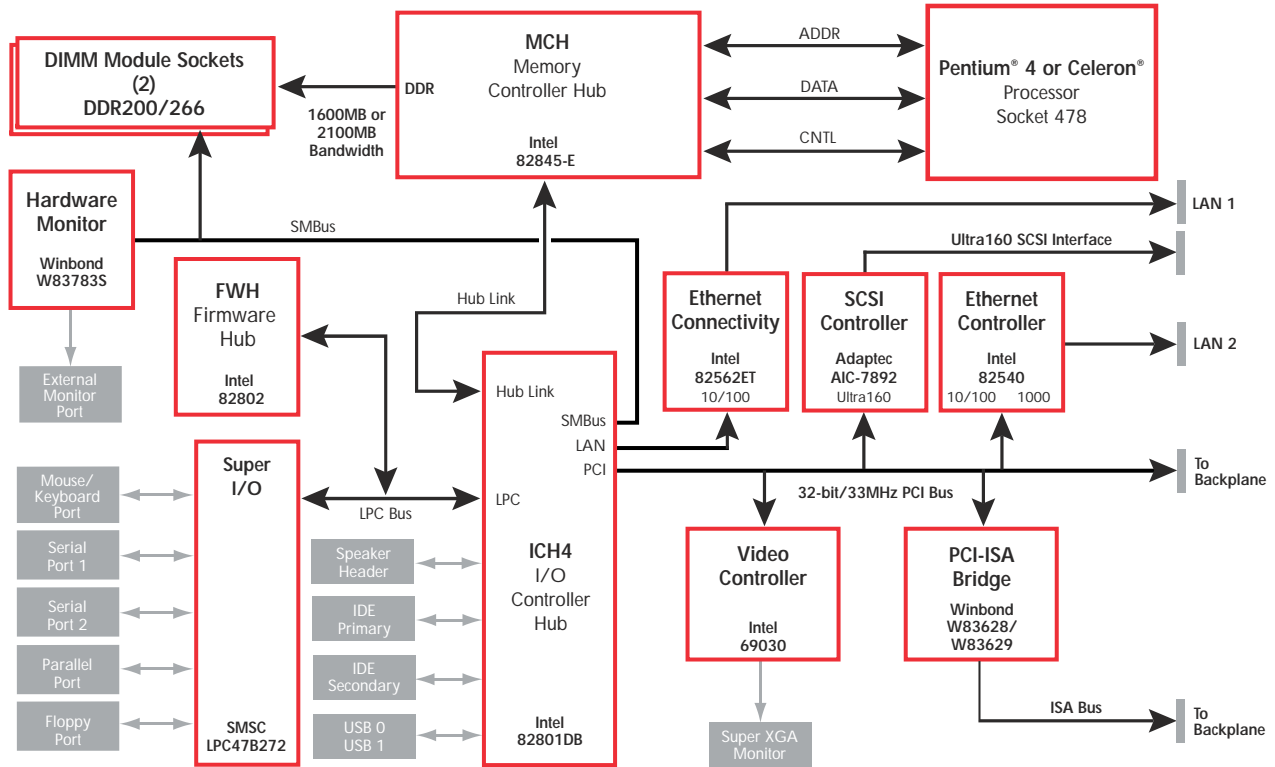

SUPER XGA INTERFACE:

The Intel 69030 video controller has 4MB of on-chip memory and supports up to 1280 x 1024 pixel resolutions. Software drivers are available for most popular operating systems.

ADDITIONAL T41 FEATURES:

System Hardware Monitor:

- The Winbond W83783S chip supports hardware monitoring. The functions monitored are:
 - Voltage: +3.3V, +/-12V, +5V and VCORE
 - Fan speed
 - Temperature
- The T41 hardware monitor driver allows the user to program the monitor limits to provide a trigger point for the application software. The user's application program can monitor these trigger points in order to send system alert messages or perform corrective actions.

Watchdog Timer:

- The programmable watchdog timer provides a system reset with a total range of 30ms to 60 seconds. The programmable increments of the watchdog are 30ms, 10s and 60s.

I/O Features:

- Two high-speed serial ports
- Enhanced bi-directional parallel interface
- Dual Universal Serial Bus (USB, Rev 2.0)
- PS/2 mouse/keyboard interface
- Floppy drive interface

STANDARDS:

- IEEE P996, Personal Computer Bus Standard
- PCI Local Bus Specification 2.1
- PICMG 1.0 Specification
- Ultra160 SCSI, SPI-3 Standard

T41 APPLICATION CONSIDERATIONS:

Power Requirements:

Typical Values

		+5V*	+12V**	+3.3V*
Pentium 4:	CPU	4.05A	6.75A	2.75A
	3.06GHz/533MHz	4.05A	6.68A	2.75A
	2.8GHz/533MHz	3.98A	4.40A	2.72A
	2.6GHz/400MHz	3.96A	3.91A	2.68A
	2.4GHz/533MHz	4.00A	3.38A	2.66A
Celeron:	CPU	4.01A	3.43A	2.72A
	2.0GHz/400MHz			

-12V* @ <100mA

- * From Backplane via PICMG® Connector
- ** From ATX12V power supply or equivalent via P4 connector

The processor's power requirements created the need for an additional on-board 4-pin power connector (P4). This connector requires +12V from an external power supply that conforms to the ATX12V power specification. This external power supply should have a minimum wattage rating of at least 250W. The T41 also requires that 3.3V be applied to the backplane from the power supply.

Temperature/Environment:

Operating Temperature:	0° to 45° C.
Storage Temperature:	-40° to 70° C.
Humidity:	5% to 90% non-condensing

The high-performance Pentium 4 processor used on the T41 can consume as much as 70 Watts of power. The T41's cooling system uses a high-reliability fan mounted to the SBC.

Mechanical:

A low profile (1.65" height) active cooling system is used on the T41 to insure reliable processor operation at elevated temperatures. Overall dimensions for the T41, including the active cooling system, are 13.3" L (338mm) x 4.8" H (121.9mm) x 1.65" W (49.1mm).

AGENCY APPROVALS:

- Designed for UL1950, CAN/CSA C22.22 No. 950-95, EN55024: 1998; EN55022: 1998 Class B; EN61000-3-2: 2000; EN61000-3-3: 1995


ORDERING INFORMATION:

Model Name: T41		CPU Speed
Model #	Pentium® 4	
S6053-108-xM	Pentium® 4	3.06GHz
S6053-107-xM		2.8GHz
S6053-006-xM		2.6GHz
S6053-104-xM		2.4GHz
S6053-002-xM		2.0GHz
S6053-502-xM	Celeron®	2.0GHz

(xM = Memory)

Intel, Pentium, Celeron and NetBurst are trademarks or registered trademarks of Intel Corporation. All other product names are trademarks of their respective owners.

Copyright ©2003 by CHASSIS PLANS. All rights reserved.



Your Custom Industrial Computer Solution

